

# CM-X16- $\phi 4 \times \phi 6$ -K



型號 / type 孔徑 / inside dia 鍵槽 / key-seating




## 撓性聯軸器 十字型止付式

CM-X 尺寸表 / Dimension

單位 / Unit : mm

規格 NO	D1×D2/公差 Tolerance(H8)		K	B	L	M	重量 (g)
	min	max					
X-16	4	6.35	16	7	18	M3	7
X-20	5	8	20	9.5	23	M4	14
X-25	5	10	25	11.5	28	M5	27
X-32	8	14	32	14	33	M5	50
X-40	10	16	40	15	35	M5	80
X-50	14	20	50	16.5	38	M6	150
X-63	15	25	63	21	47	M6	300

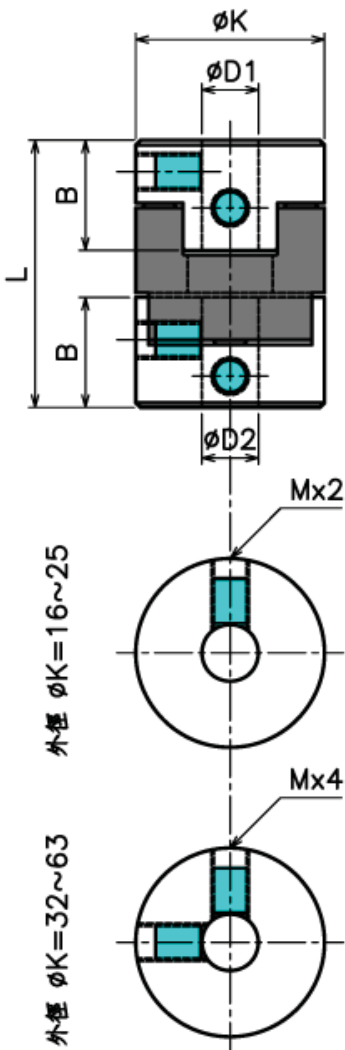

CM-X 特性表 / Specifications

規格 NO	常用 扭力 (N.m)	最大 扭力 (N.m)	偏心 (mm)	偏角 (o)	最高 轉數 (rpm)	剛性靜 扭力值 (N.m/rad)	慣性矩 (Kg.m <sup>2</sup> )
X-16	0.7	1.4	1	3	3500	31	$3.2 \times 10^{-7}$
X-20	1.2	2.4	1.5	3	7600	60	$1.0 \times 10^{-6}$
X-25	2	4	2	3	6100	140	$3.0 \times 10^{-6}$
X-32	4.5	9	2.5	3	4800	280	$9.5 \times 10^{-6}$
X-40	9	18	3	3	3800	540	$2.3 \times 10^{-5}$
X-50	18	36	3.5	3	3100	820	$6.7 \times 10^{-5}$
X-63	36	72	4	3	2400	1900	$2.2 \times 10^{-4}$

### FEATURES :

- ✦ 高剛性 / High Rigidity
- ✦ 絕緣性佳 / Electrical Insulation
- ✦ 組合容易 / Easy Assembly
- ✦ 耐油性 / Oil Resistance
- ✦ 容許偏心、偏角大 / High Allowable Error of Eccentricity and Angularity Misalignment
- ✦ 緩衝材：工程塑膠 / Buffer Material : Engineering Plastic
- ✦ 固定方式：止付螺絲固定式 / Fix TYPE : Setscrew
- ✦ 使用溫度範圍：-20°C~80°C / Working range , -20°C~80°C Temperature