

型號 / type

孔徑 / inside dia



高剛性鋼片聯軸器 間隔套型


CM-W 尺寸表 / Dimension

單位 / Unit : mm

規格 NO	D1×D2/公差 Tolerance(H8)		H	K	B	E	F	J	L	M
	min	max								
68-W	10	25	38	68	25	4.25	23.8	32.3	82.3	M6
82-W	12	35	52	82	25	4.75	25.8	35.3	85.3	M6
94-W	12	40	56	94	30	9.4	30.4	49.2	109.2	M8
105-W	12	42	66	105	33	10	30.6	50.6	116.6	M8
128-W	25	50	78	128	40	11	38.6	60.6	140.6	M10
144-W	30	55	90	144	45	11.6	45.6	68.8	158.8	M10
168-W	35	70	105	168	57.2	16.8	44.4	78	192.4	M14
194-W	40	80	118	194	64.5	15	55	85	214	M16
214-W	45	95	137	214	76.2	21.6	53.8	97	249.4	M16
246-W	50	110	156	246	88.9	23.9	61.2	109	286.8	M20
276-W	70	120	169	276	101.6	27.2	79.6	134	337.2	M24

CM-W 特性表 / Specifications

規格 NO	常用 扭力 (N.m)	最高 轉速 (rpm)	本體最大軸徑(mm)			彈簧定數 (N.m/rad)
			標準 N	延長 L	擴大 K	
68-W	45	20000	25	25	30	1.18×10^4
82-W	95	20000	35	35	40	3.92×10^4
94-W	175	18000	40	40	42	7.84×10^4
105-W	245	15000	42	42	48	12.7×10^4
128-W	440	13000	50	50	60	21.6×10^4
144-W	780	12000	55	55	70	39.2×10^4
168-W	1270	10000	70	70	80	73.5×10^4
194-W	2060	8000	80	80	90	11.3×10^5
214-W	3330	7500	95	95	110	16.2×10^5
246-W	5290	3400	110	110	120	21.4×10^5
276-W	6860	3100	120	120	130	29.1×10^5

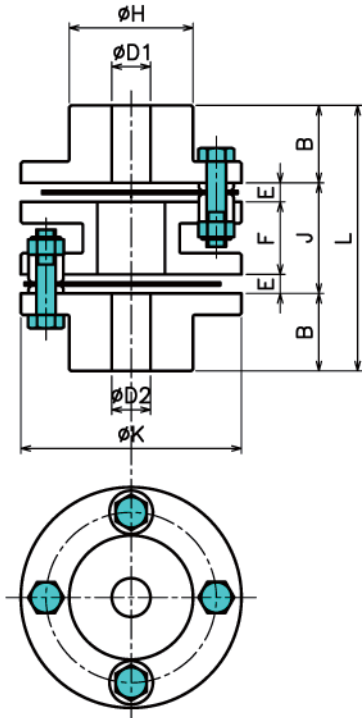

FEATURES :

- ✦ 高剛性 / High Rigid
- ✦ 高扭力 / High Torque
- ✦ 零迴轉間隙 / Zero Backlash
- ✦ 適合用於工具機械，高精密傳動機組 /

The Features applicable For Working Machinery and it comes with the hi-precision transfer function