


SCFB 外徑攻牙軸心 (SUJ2鍍鉻, 不生銹)

Tapped Shaft (Anticorrosive)

材質：軸承鋼 (SUJ2) 相似高週波熱處理，研磨及表面鍍硬鉻
 Material: SUJ2 (high carbon chromium steel)
 Heat treatment, ground, chromium plated and polished

硬度：HRC 60±3
 Hardness: HRC 60±3

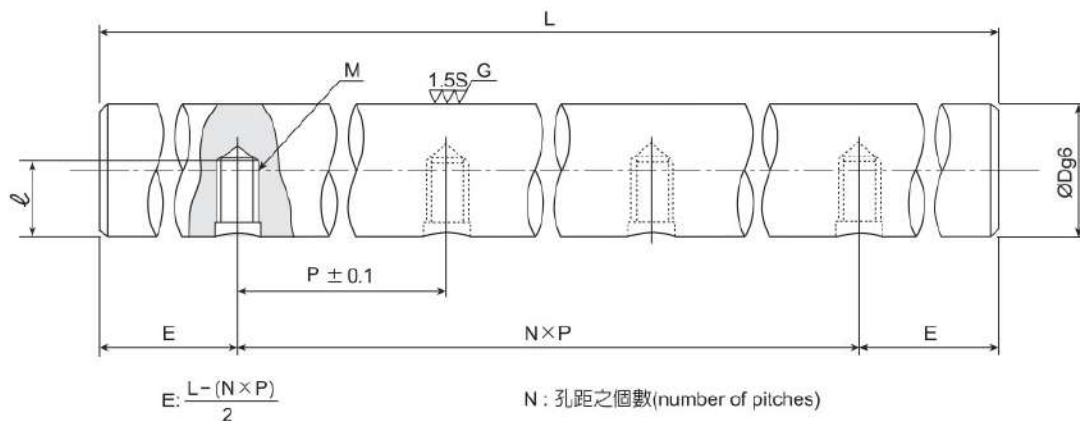

單位 (unit): mm

外徑 Diameter	型號 Type	外徑公差 µm Diameter tolerance	孔距 Pitch	螺栓 Nominal screw	螺牙深度 Thread depth	最大長度 Max length	重量 Weight
D	SCFB	g6	P	M	ℓ	L(max)	kg/m
12	SCFB12	-6 -17	100	M4x0.7	5.5	4,000	0.89
16	SCFB16		150	M5x0.8	7	4,000	1.58
20	SCFB20	-7 -20	150	M6x1	10	4,200	2.47
25	SCFB25		200	M6x1	12	4,200	3.85
30	SCFB30		200	M8x1.25	15	4,200	5.55
35	SCFB35	-9 -25	200	M8x1.25	15	4,200	7.55
40	SCFB40		300	M8x1.25	18	4,200	9.87

Example of identification number:

SCFB 20x1500

① ②

① Type: Shaft diameter

② Overall Length

訂購例：

SCFB 20x1500

① ②

① 型號：軸心外徑

② 總長度