


SUSB 外徑攻牙軸心

Tapped Shaft

材 質：不銹鋼(SUS 303 or SUS 304)

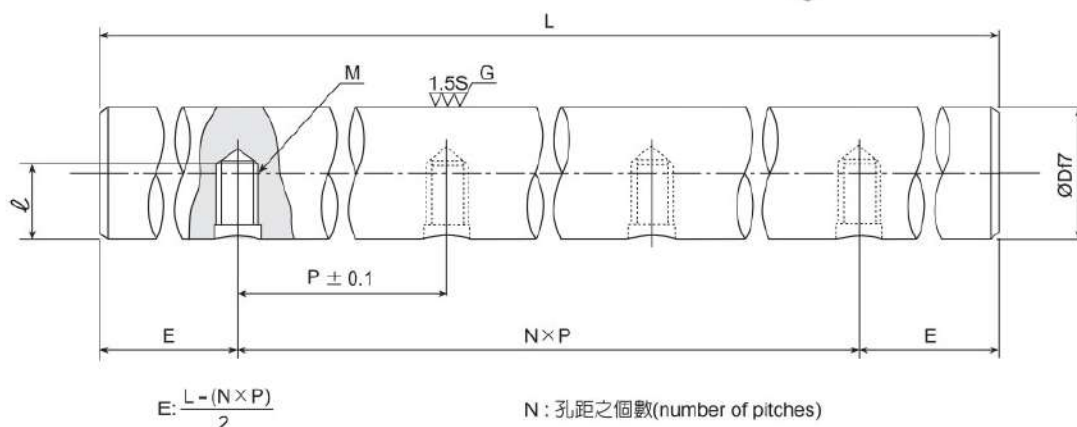

單位(unit) : mm

| 外徑 Diameter | 型號 Type | 外徑公差 µm Diameter tolerance | 孔距 Pitch | 螺栓 Nominal screw | 螺牙深度 Thread depth | 最大長度 Max length | 重量 Weight |
|----------------|------------|----------------------------------|-------------|---------------------|----------------------|--------------------|--------------|
| D | SUSB | f7 | P | M | ℓ | L(max) | kg/m |
| 12 | SUSB12 | -16 | 100 | M4x0.7 | 5.5 | 4,000 | 0.89 |
| 16 | SUSB16 | -34 | 150 | M5x0.8 | 7 | 4,000 | 1.58 |
| 20 | SUSB20 | -20 -41 | 150 | M6x1 | 10 | 4,200 | 2.47 |
| 25 | SUSB25 | | 200 | M6x1 | 12 | 4,200 | 3.85 |
| 30 | SUSB30 | | 200 | M8x1.25 | 15 | 4,200 | 5.55 |
| 35 | SUSB35 | -25 | 200 | M8x1.25 | 15 | 4,200 | 7.55 |
| 40 | SUSB40 | -50 | 300 | M8x1.25 | 18 | 4,200 | 9.87 |

Example of identification number:

SUSB 20x1500

① ②

① Type: Shaft diameter

② Overall Length

訂購例 :

SUSB 20x1500

① ②

① 型號：軸心外徑

② 總長度